


DİRSEK / ELBOW

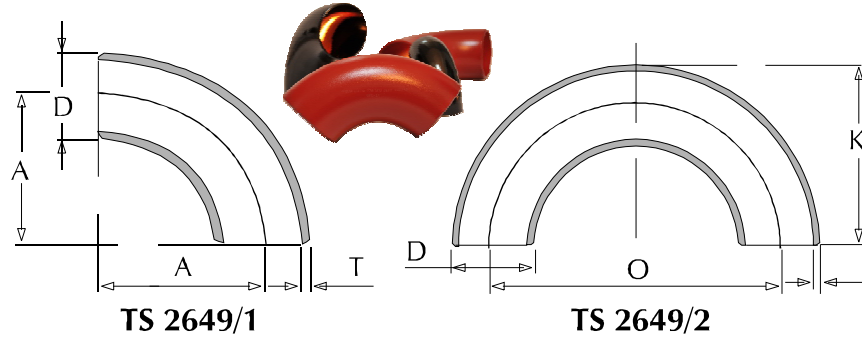


DIN 2605 TS 2649/1 DIN EN 10253-2

R≤1,5 D

Anma Çapı / (DN)	Anma Çapı / (INCH)	Ölçü / (MM) Dimension	Et Kalınlığı (MM) Thickness Wall	90° (A)	180° (O)	(K)	Kg/Adet Kg/Pc
15	1/2"	21,3	2,0	27,5	55,0	38	0,04
20	3/4"	26,9	2,3	28,5	57,0	42	0,06
25	1"	33,7	2,6	38,0	76,0	55	0,12
32	1¼"	42,4	2,6	47,5	95,0	69	0,19
40	1½"	48,3	2,6	57,0	114,0	81	0,26
50	2"	60,3	2,9	76,0	152,0	106	0,49
65	2½"	73,0	2,9	95,0	190,0	132	0,65
65	2½"	76,1	2,9	95,0	190,0	133	0,78
80	3"	88,9	3,2	114,5	229,0	159	1,22
100	4"	114,3	3,6	152,5	305,0	210	2,36
125	5"	139,7	4,0	190,5	381,0	260	4,01
150	6"	168,3	4,5	228,5	457,0	313	6,53
200	8"	219,1	5,9	305,0	610,0	415	15,80
250	10"	273,0	6,3	381,0	762,0	518	24,80
300	12"	323,9	7,1	457,0	914,0	619	39,80
350	14"	355,6	8,0	533,5	1067,0	711	57,50
400	16"	406,4	8,8	609,5	1219,0	813	82,60
450	18"	457,2	10,0	686,0	1372,0	915	119,00
500	20"	508,0	11,0	762,0	1524,0	1016	161,00
600	24"	610,0	12,7	914,0	1828,0	1219	260,00



DİRSEK / ELBOW

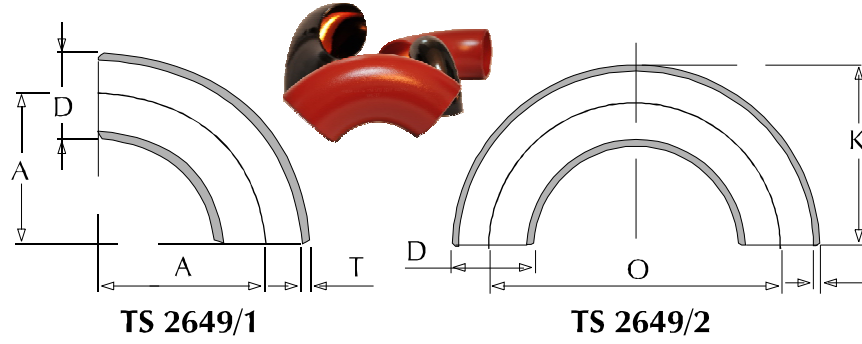

STD - SCH 40 ANSI B16.28 ASTM A-234

R≤1,5 D

Anma Çapı (Dn)	Ölçü D (mm) Dimension	Tıp/ Type	Et Kalınlığı / Thickness Wall		(90°) A	(180°) O	(k)	Kg/Adet Kg/Pc
			(mm)	(inch)				
1/2"	21,3	STD	2,77	0,109	27,5	55,0	38	0,08
3/4"	26,7	STD	2,87	0,113	28,5	57,0	42	0,08
1"	33,4	STD	3,38	0,133	38,0	76,0	55	0,15
1 1/4"	42,2	STD	3,56	0,140	47,5	95,0	69	0,26
1 1/2"	48,3	STD	3,68	0,145	57,0	114,0	81	0,38
1"	60,3	STD	3,91	0,154	76,0	152,0	106	0,68
2 1/2"	73,0	STD	5,16	0,203	95,0	190,0	132	1,33
2 1/2"	74,1	STD	5,16	0,203	95,0	190,0	133	1,33
3"	88,9	STD	5,49	0,216	114,5	229,0	159	2,08
4"	114,3	STD	6,02	0,237	152,5	305,0	210	3,95
5"	141,3	STD	6,55	0,258	190,5	381,0	261	6,67
6"	168,3	STD	7,11	0,280	221,5	443,0	306	10,40
8"	219,1	STD	8,18	0,322	305,0	610,0	415	20,90
10"	273,0	STD	9,27	0,365	381,0	762,0	518	37,00
12"	323,9	STD	9,53	0,375	457,0	914,0	619	54,00
12"	323,9	SCH 40	10,31	0,406	457,0	914,0	619	61,5
14"	355,6	STD	9,52	0,375	533,5	1067,0	711	69,90
14"	355,6	SCH 40	11,00	0,433	533,5	1067,0	711	83,06
16"	406,4	STD	9,52	0,375	609,5	1219,0	813	91,20
16"	406,4	SCH 40	12,50	0,492	609,5	1219,0	813	105,3
18"	457,2	STD	9,52	0,375	686,0	1372,0	915	116,0
18"	457,2	SCH 40	14,20	0,559	686,0	1372,0	915	176,21
20"	508,0	STD	9,52	0,375	762,0	1524,0	1016	144,00
20"	508,0	SCH 40	15,09	0,594	762,0	1524,0	1016	282,00
24"	610,0	STD	9,52	0,375	914,0	1828,0	1219	208,00
24"	610,0	SCH 40	17,50	0,689	914,0	1828,0	1219	382,00

XS - SCH 80 ANSI B16.28 ASTM A-234

R≤1,5 D

1/2"	21,3	XS	3,73	0,147	27,5	55,0	38	0,10
3/4"	26,7	XS	3,91	0,154	28,5	57,0	42	0,10
1"	33,4	XS	4,55	0,179	38,0	76,0	55	0,20
1 1/4"	42,2	XS	4,85	0,191	47,5	95,0	69	0,34
1 1/2"	48,3	XS	5,08	0,200	57,0	114,0	81	0,48
2"	60,3	XS	5,54	0,218	76,0	152,0	106	0,91
2 1/2"	73,0	XS	7,01	0,276	95,0	190,0	132	1,73
2 1/2"	76,1	XS	7,01	0,276	95,0	190,0	133	1,75
3"	88,9	XS	7,62	0,300	114,5	229,0	159	2,78
4"	114,3	XS	8,56	0,337	152,5	305,0	210	5,40
5"	141,3	XS	9,52	0,375	190,5	381,0	261	9,34
6"	168,3	XS	10,97	0,432	221,5	443,0	306	15,50
8"	219,1	XS	12,70	0,500	305,0	610,0	415	31,30
10"	273,0	XS	12,70	0,500	381,0	762,0	518	49,40
10"	273,0	SCH 80	15,09	0,594	381,0	762,0	518	61,30
12"	323,9	XS	12,70	0,500	457,0	914,0	619	71,20
12"	323,9	SCH 80	17,50	0,689	457,0	914,0	619	94,70
14"	355,6	XS	12,70	0,500	533,5	1067,0	711	91,60
14"	355,6	SCH 80	19,05	0,750	533,5	1067,0	711	132,00
16"	406,4	XS	12,70	0,500	609,5	1219,0	813	120,00
16"	406,4	SCH 80	21,44	0,844	609,5	1219,0	813	195,00
18"	457,2	XS	12,70	0,500	686,0	1372,0	915	153,00
18"	457,2	SCH 80	23,83	0,938	686,0	1372,0	915	273,00
20"	508,0	XS	12,70	0,500	762,0	1524,0	1016	190,00
20"	508,0	SCH 80	26,19	1,031	762,0	1524,0	1016	372,00
24"	610,0	XS	12,70	0,500	914,0	1828,0	1219	275,00
24"	610,0	SCH 80	30,96	1,219	914,0	1828,0	1219	510,00

NOT: ANSI B16.28 LONG RADIUS = DIN 2605 SHORT RADIUS